

I32ZI-OQ Series

32-Inch 4K UHD 10-Point PCAP Touchscreen Monitor
Full Optical Bonding/ **Anti-Reflection Coating***

32"

Model Name:

- I32ZI-OQ-45P0
- I32ZI-OQ-45PG
- I32ZI-OQ-45PS
- I32ZI-OQ-45PT
- I32ZI-OQ-45PTC*



Anti-Reflection Coating
(I32ZI-OQ-45PTC Only)

DESCRIPTIONS

Technological advances and price decreases have increased the market for large 4k touchscreen displays substantially. These innovative designs, comprised of 4k 32" displays and above, are creating opportunities in digital signage, corporate webinars, and infotainment. Feel free to inquire about our large touchscreen LCDs or engage us with your latest solution project and let our engineers position you for something big.

This touchscreen monitor adheres to TAA requirements as needed, ensuring smooth integration and peak performance for uninterrupted 24/7 operation year-round.

KEY FEATURES

- 32-Inch Screen Size
- 3840 x 2160 4K UHD Resolution
- Interface: HDMI x2/ DisplayPort (DP) x2/ Audio/ USB-B
- Projected Capacitive (PCAP) 10-Points Touch
- Zero Bezel Touchscreen
- Full Optical Bonding/ AR Coating *(I32ZI-OQ-45PTC Only)*
- TAA Compliance *(I32ZI-OQ-45PS, I32ZI-OQ-45PT, I32ZI-OQ-45PTC Only)*
- 3-Year Warranty



SPECIFICATIONS


	I32ZI-OQ-45P0	I32ZI-OQ-45PG	I32ZI-OQ-45PTC *	I32ZI-OQ-45PS	I32ZI-OQ-45PT
DISPLAY					
Size	32 In				
Resolution	3840 x 2160				
Display Area (mm)	698.40 (H) x 392.85 (V)				
Aspect Ratio	16 : 9				
Viewing Angle	9.5ms				
Response time	178° / 178°				
Brightness	350cd/m ²				
Contrast Ratio	1000 : 1				
Color Depth	1.073G				
Backlight	LED				
INTERFACE					
Ports	HDMI x2, DP x2, Audio x1, USB Type-B x1				
TOUCH TECHNOLOGY					
Type / Point / Glass	Projected Capacitive PCAP / 10-Point / 3mm Strengthen Glass				
FEATURES					
Optical Bonding	Yes / Full Optical Bonding				
Anti-Reflection Coating*	N/A	N/A	Yes	N/A	N/A
CABINET					
Color/Material	Black / Metal Housing				
POWER					
Rating	AC 100V ~ 240V, 50/60Hz				
TEMPERATURE					
Operating / Storage	32° F ~ 122° F (0° C ~ 50° C) / -4° F ~ 140° F (-20° C ~ 60° C)				
HUMIDITY					
Operating / Storage	10% ~ 80% / 5% ~ 95%				
DIMENSIONS (WxHxD)					
Inch / Millimeter	29.5 x 17.8 x 2.2 / 750.4 x 452.7 x 56.5				
WEIGHT					
Net Weight	30.8 lbs (14 kg)				
VESA™					
Mount Size (mm)	200 x 200				
REGULATION					
Certification	CE / FCC				
COMPLIANT					
TAA	N/A	N/A	Yes	Yes	Yes
SILK PRINT					
Logo	N/A	Yes	Yes	N/A	Yes

ORDERING INFO

Model Number	AR Coating	TAA Compliant	Logo
I32ZI-OQ-45P0	X	X	X
I32ZI-OQ-45PG	X	X	O
I32ZI-OQ-45PTC	O	O	O
I32ZI-OQ-45PS	X	O	X
I32ZI-OQ-45PT	X	O	O

DIMENSIONS

Unit: mm

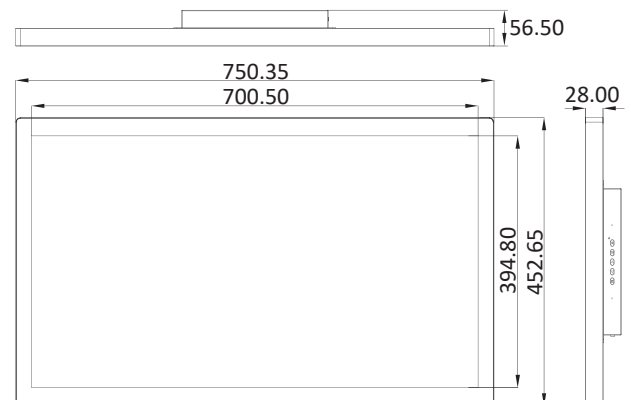

Note: Panel and specifications subject to change without notice.