



55-Inch / 0.88mm Ultra Slim Bezel / 1080p Full HD

VW55CD-OD-40008

VIDEO WALL

GVision's 55-inch ultra slim bezel 0.88mm video wall displays create visually stunning digital wall that is easily maintain and manage. With built-in processor, GVision's video wall able to display stretched images across entire monitor up to 10x10. Our commercial video wall is designed to operate 24/7. Combined with our standard / custom mounting system and our PC based video controle, GVision provides a complete video wall systems that's ideal for command & control centers, offices, shopping malls, stadiums, concert halls, and public transportation.



1920 x 1080p
Full HD




HDMI Digital
Input



Display Port
Input



Built-In
Processor



0.88mm
Slim Bezel



Operate
24 / 7




LED
Backlight
Unit



3-Years
Warranty

0.88MM ULTRA SLIM BEZEL VIDEO WALL DISPLAY

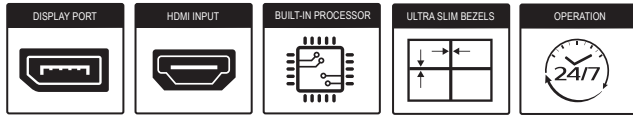

COLOR CALIBRATION

Factory tune to manage brightness and color uniformity conveniently with Color Calibration Suite software probe sensor hardware



Factory tuning color calibration of white balance




After calibrate and fine tuned white balance



ULTRA SLIM BEZEL

Ultra Slim **0.88mm** bezel construction makes this public transportation, display system attractive for close range viewing on indoor installations. **Also available 3.5mm thin bezel and 1.8mm Slim bezel.**

DIMENSION

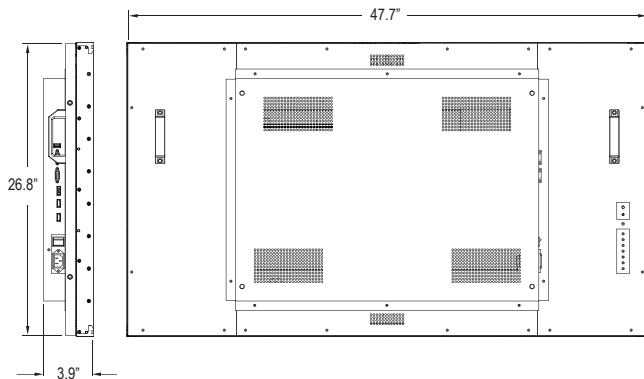

FEATURES

- **0.88mm** Ultra Slim Bezel
- Built-In **Video Processor** for Daisy Chain
- Display **4K** Content Over **2 x 2** Video Wall
- Configurable Up To **10 x 10** Screens
- Design for **24 / 7 / 365** Operation
- Scissor, Swing Door, Floor Stand, **Custom Design Mount**

SPECIFICATIONS

| DISPLAY | VW55CD-OD-40008 |
|----------------|-------------------------|
| Screen Size | 55 In |
| Resolution | 1920 x 1080 |
| Bezel Width | 0.88mm (0.44mm L/R/T/B) |
| Aspect Ratio | 16 : 9 |
| Viewing Angle | 178° / 178° |
| Brightness | 500cd/m ² |
| Contrast Ratio | 1400 : 1 |
| LCD Technology | Commercial Grade IPS |

| INTERFACE | |
|------------------|-------|
| HDMI In / Out | 1 / 1 |
| Display Port In | 1 |
| RS-232C In / Out | 1 / 1 |

| FEATURES | |
|--------------------|---------|
| Max. Daisy Chain | 10 x 10 |
| Built-In Processor | Yes |
| Auto Pixel Shift | Yes |
| White Balance | Yes |
| Cooling | Passive |
| Temperature Sensor | Yes |

| POWER | |
|--------------------|-------------------------|
| Consumption | < 280W |
| Electrical Ratings | AC 100V ~ 240V, 50/60Hz |

| TEMPERATURE | |
|-------------|-------------------------------|
| Operating | 32° F ~ 122° F (0° C ~ 50° C) |

| DIMENSIONS (WxHxD) | |
|--------------------|-------------------|
| Inch (in) | 47.7 x 26.8 x 3.9 |


| WEIGHT | |
|------------|-----------------|
| Net Weight | 77.2 lbs (35kg) |

| VESA™ | |
|-----------------|-----------|
| Mount Size (mm) | 600 x 400 |

| MOUNT OPTION | |
|--------------|---|
| Custom Mount | VW-S (Scissor), VW-SD (Swing Door), VW-FS (Floor Stand), VW-C (Custom Design) |

Specifications subject to change without any notice

OPTIMAL MOUNT & VIDEO WALL CONTROLLER

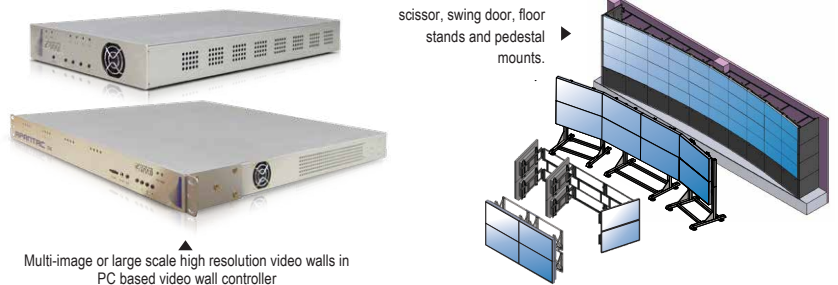

Multi-image or large scale high resolution video walls in PC based video wall controller